




TECNOSUB

Subsea Bolt Tensioning System



hydratight

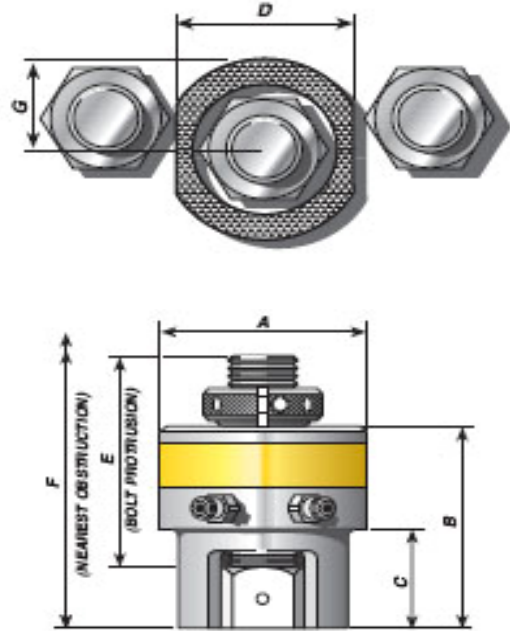

(All parts tested and fully certificated)

Hydratight Aquajack Bolt Tensioners - AJ Series

Unique reaction nut design allows rapid tool removal and application to long bolts and damaged threads.

30mm maximum piston stroke. All tools incorporate visible piston stroke indicator.

Innovative tool design ensures maximum tool strokes can be used without overstroking the piston or oil spillage.

Maximum tool operating pressure 1500 bar (21750 psi).

Complete System Including:

Aquajacks AJ series plus reaction nuts (Quantity available up to 100% tensioning)

Link Pipes Asy 1,0 m-1500 bar

Link Pipes 5 m-1500 bar

"Y" Pipes Asy 2,0 m-1500 bar

Hose Reel & Stand SS plus Pipe 90 m-1500 bar

Complete Sets of spare parts

Certification package

Air Operated Pump Tensioner Hydratight 10-6 Series (See Pump Data Sheet)

TECNOSUB'S HEADQUARTERS

c/ Pau del Protectorat, 18
43004 - Tarragona (SPAIN)

Tel: +34 977 252 802 Fax: +34 977 237 551

www.tecnosub.net

E-mail: spain@tecnosub.net





TECNOSUB



Hydraulic Tensioner Pump

hydratight



Hydratight Air Operated Pump 10-6 Series

The 10-6 series pump is a safe, low maintenance and durable unit that meets the requirements of all on-site bolt tensioning operational needs.

This air operated pump is a particularly suitable for projects where a higher oil flow is required, such as subsea duties or where a large number of high capacity tensioners are being used.

Approximate rate of discharge litres per minute:

		Fluid Discharge Pressure (bar)							
		0	207	414	621	862	1034	1379	1724
Air (bar)	4	1	0,8	0,7	0,62	0,51	0,44	0	0
	6	1,07	0,93	0,84	0,75	0,66	0,61	0,49	0,16
	7	1,15	0,97	0,88	0,8	0,72	0,66	0,56	0,46

Pack Dimensions:		Other:	
Length	380 mm	Weight	23,5 Kgr
Width	400 mm	Air Consumption	1,586 m ³ /min
Height	438 mm		

TECNOSUB'S HEADQUARTERS

c/ Pau del Protectorat, 18
 43004 - Tarragona (SPAIN)
 Tel: +34 977 252 802 Fax: +34 977 237 551
 www.tecnosub.net
 E-mail: spain@tecnosub.net

